

APTANY



WEBSITE

Wanli Tire Corporation Limited

Headquarters:

NO.3 Wanli Road, Aotou Town, Conghua District, Guangzhou, P.R.China

Marketing Center:

Guangzhou Intelligent Manufacturing Park, No.620, Shibe Industrial Road, Dashi Street, Panyu District, Guangzhou, Guangdong, P.R.China.

E-mail:sales@wanlitire.cn

REV 24.04

APTANY



APTANY PASSENGER CAR & LIGHT TRUCK TIRE CATALOG

HP/UHP/HT/AT/RT/MT/LT/RFT/WINTER/ALL SEASON

WANLI TIRE CORPORATION LIMITED

COMPANY PROFILE

ABOUT US

Wanli Tire Co., Ltd. is controlled directly by Guangzhou Industrial Investment Holding Group Co., Ltd. It has three production bases, Conghua, Hefei, and Diamond. The current production capacity is 30.4 million sets, including 24 million PCR tires, 2.4 million TBR tires, and 4 million two-wheeled tires, with an output value of 6 billion yuan.

30.4million
production capacity

24million
PCR tires

2.4 million
TBR tires

4 million
two-wheeled tires

6 billion
output value

BRAND

"WANLI", "SUNNY", "APTANY" and "MILEVER" are four tire brands Wanli Tire Corporation Limited sells in overseas market. Wanli Tire Corporation constantly develops and enriches the product line with the change of market, which has covered nine series of passenger tire products of Economic, Comfort, Racing tire, UHP, SUV on/off-road, LT, Run Flat tire, Winter tire, and All Season tire with more than 6,000 sizes which can meet all requirements from different markets. Our major products incorporate patterns like Comfort series SP026, UHP series SA302 SUV series SU025, etc.

R & D STRENGTH

WANLI has a national-level enterprise technology center, a nationally recognized laboratory, a contracted laboratory of the China Rubber Industry Association, a post-doctoral research station, a Guangdong academician expert enterprise workstation, and a Guangdong engineering technology research and development center. With a full range of simulation analysis capabilities and the trial production and testing capabilities of rubber tires, it has a series of international advanced R&D facilities and has established advanced laboratories including tire rolling resistance, rigidity, six-component force, high-speed uniformity, noise and vibration, modal analysis, etc., making its R&D capabilities at the leading level in China.

PRODUCT STRENGTH


WANLI is committed to providing consumers with high-quality tires, and officially passed the TÜV Rheinland test, becoming the first tire enterprise in China to pass the TÜV Rheinland test. In 2016, Wanli Tire Comfort Series H220 was included in the first and second batches of "Automotive Green Tire Grade Certification" issued by China Automotive Technology and Research Center, which shows that WANLI's product quality and technical strength are in the leading position in China.

MARKET RECOGNITION

Wanli Tire earns a good reputation in domestic and overseas markets, and its products sell well in more than 150 countries and regions around the world. In terms of OE market, WANLI supplies more than 80 models of more than 20 OEMs, including Dongfeng Citroen / Peugeot, Zhengzhou Nissan, Beijing Hyundai, GAC Trumpchi, GAC Honda, JAC, GAC Hino, Nanjing Jinlong, Zhuzhou CRRC and Bombardier.

FUTURE

In the future, WANLI will continue to make efforts in R&D, manufacturing, branding and sales to build the first large state-owned enterprise covering rubber parts for the whole vehicle industry in China. It is planned to achieve an output value of 10 billion yuan by 2025, ranking among the top five in China's tire industry and the top three in technological research and development in China's tire industry.

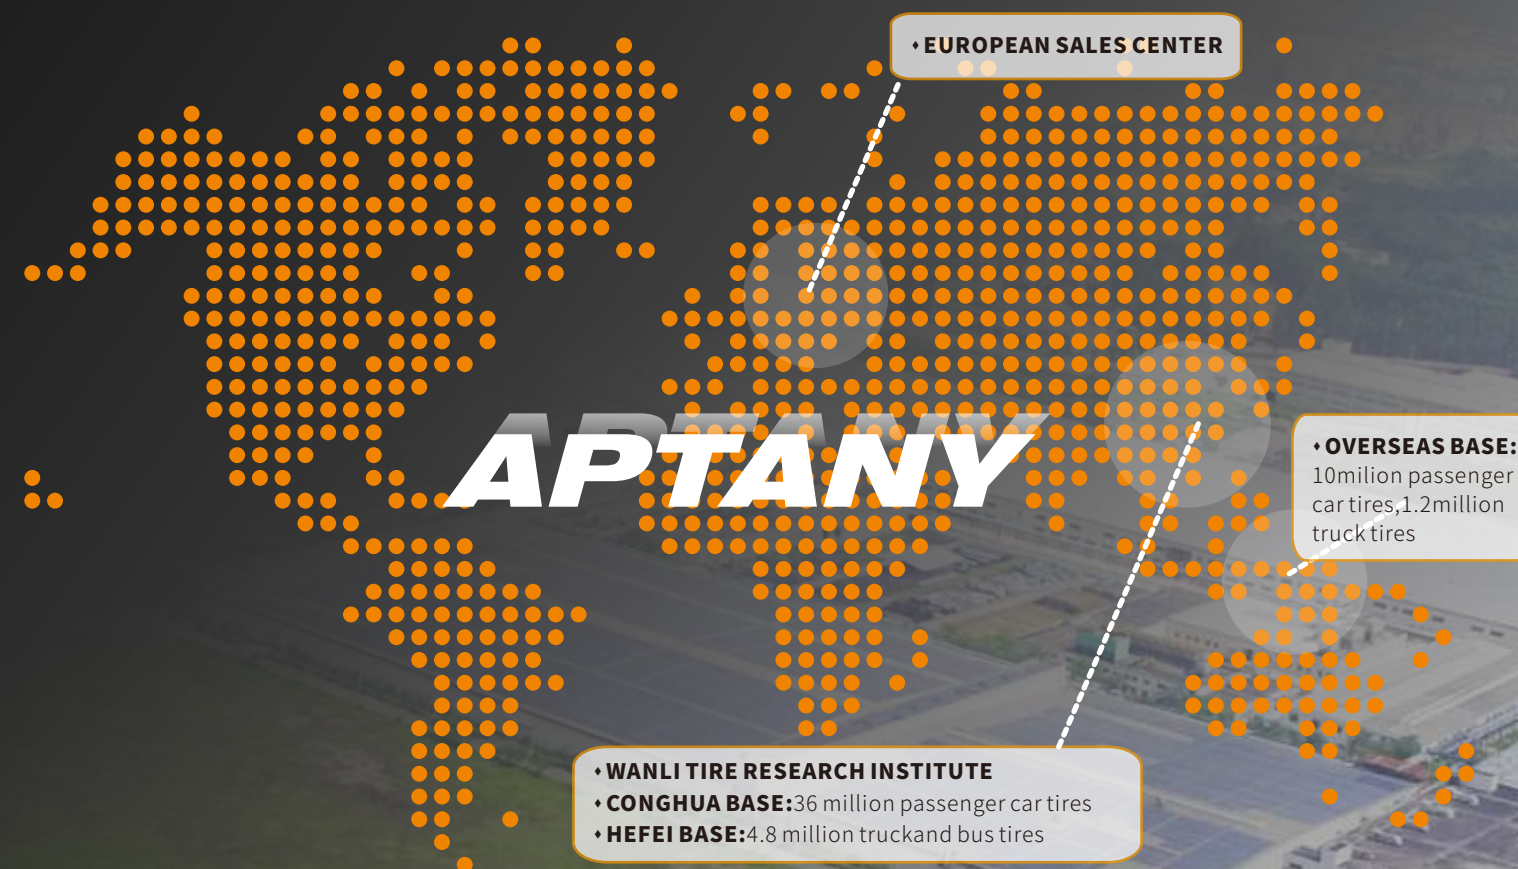

CONTENTS

APTANY PRODUCT

COMFORT SERIES

SPORT SERIES



RP203



RP062



RA301



RA342

RUN-FLAT SERIES

LIGHT TRUCK SERIES



RA302



RL106

SUV/4X4 SERIES



RU025



RU158



RU006



RU042



RU149



RM105

RACING SERIES

ALL SEASON SERIES



SPORT RACING




RC501




RC513

WINTER SERIES




RW211



RW611



RW631



RW312



RW103

COMFORT SERIES..... 01

• RP203 RP062

SPORT SERIES..... 05

• RA301 RA342

RUN-FLAT SERIES 09

• RA302

LIGHT TRUCK SERIES..... 11

• RL106

SUV/4X4 SERIES 13

• RU025 RU158 RU006 RU042 RU149 RM105

RACING SERIES..... 25

• SPORT RACING

ALL SEASON SERIES..... 27

• RC501 RC513

WINTER SERIES..... 31


• RW211 RW611 RW631 RW312 RW103

RP203

SUITABLE FOR SMALL/COMPACT CARS



Rim Size: 12-16
Speed Rating: T-V
Series: 50-80

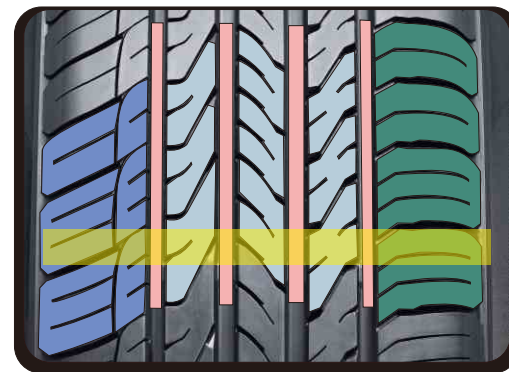

■ The soft tread favors ride comfort and wet performance.

■ Closed outside groove design can reduce air resonance effect of side grooves and the main grooves, reducing noise to some extent. The high rigidity of the outer tread provides good handling.

■ Many steel tread grooves and ribs on a certain extent, enhance the softness of the tread to improve comfort performance, while enhancing wet land drainage performance.

■ Four wide longitudinal straight grooves with capability of quick water drainage effectively improve handling stability on wet road.

■ Tread formula design: Specialized new tread compound formula ensures better handling, lower rolling resistance as well as shorter braking distance on dry/wet road.

RP203A

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
12	145/70R12	-	69T	-	4½J/4.50B	150	509	250	325
	155/70R12	-	73T	-	4½J/4.50B	157	523	250	365
	145/80R12	-	74T	-	4J/4.00B	145	537	240	375
13	155/65R13	-	73T	-	4.50B/4½J	157	532	250	365
	155/70R13	-	75T	-	4.50B/4½J	157	548	250	387

RP203

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
12	165/70R12	-	77T	-	5.00B/5J	170	537	250	412
	165/60R13	-	73T	-	5.00B/5J	170	528	250	365
	175/60R13	-	77T	-	5.00B/5J	177	540	250	412
	165/65R13	-	77T	-	5.00B/5J	170	544	250	412
13	165/70R13	-	79T	-	5.00B/5J	170	562	250	437
	175/70R13	-	82T	-	5.00B/5J	177	576	250	475
	185/70R13	-	86H	-	5.50B/5½J	189	590	250	530
	175/75R13	-	84T	-	5J	177	584	250	500
14	165/55R14	-	72H	-	5J	170	538	250	355
	185/55R14	-	80H	-	6J	194	560	250	450
	165/60R14	-	75H	-	5J	170	554	250	387
	185/60R14	-	82H	-	5½J	189	578	250	475
	195/60R14	-	86H	-	6J	201	590	250	530
	205/60R14	-	88H	-	6J	209	602	250	560
	165/65R14	-	79T	-	5J	170	570	250	437
	175/65R14	-	82T	-	5J	177	584	250	475
	175/65R14	-	86T	XL	5J	177	584	290	530
	185/65R14	-	86H	-	5½J	189	596	250	530
15	165/70R14	-	81T	-	5J	170	588	250	462
	175/70R14	-	84T	-	5J	177	602	250	500
	185/70R14	-	88H	-	5½J	189	616	250	560
	185/70R14	-	88T	-	5½J	189	616	250	560
	195/70R14	-	91H	-	6J	201	630	250	615
	195/70R14	-	91T	-	6J	201	630	250	615
	205/70R14	-	95H	-	6J	209	644	250	690
	175/75R14	-	86T	-	5J	177	618	250	530
	165/80R14	-	85T	-	4½J	165	620	240	515
	165/50R15	-	72T	-	5J	170	547	250	355
16	195/50R15	-	82V	-	6J	201	577	250	475
	185/55R15	-	82V	-	6J	194	585	250	475

RP062

SUITABLE FOR SMALL/COMPACT CARS



Rim Size: 13-16
Speed Rating: T-V
Series: 40-70



SIGNIFICANTLY
IMPROVED COMFORT

- Optimize the excessive curvature of tread and sidewall to improve the overall cushioning of the tire against vibration, so that the vibration is smoother and the driving comfort is improved.
- The tread grooves are specially treated with the latest "3D self-conducting technology", which makes the vibration feel soft and the airflow smoothly conducted, and improves the quietness and comfort performance.

NEWLY UPGRADED
MUTE TECHNOLOGY

- Multi-layer variable pitch design reduces the resonance amplitude of the air in the pattern gap and lowers the noise.
- The fine grooves of the tread pattern are designed with an inclined angle, which regulates the audio generated by the tread blocks and the impact on the road surface, and effectively reduces the tire noise.

MORE ENERGY-SAVING
AND DURABLE

- The tread is designed with the latest high silicon content formula, which is more energy-saving and environmentally friendly. Compared with the previous generation of products, it is more environmentally friendly and durable.


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/60R13	-	77T	-	5J	177	540	250	412
	165/65R13	-	77T	-	5J	170	544	250	412
	165/70R13	-	79T	-	5J	170	562	250	437
	175/70R13	-	82T	-	5J	177	576	250	475
14	205/60R14	-	88H	-	6J	209	602	250	560
	185/65R14	-	86H	-	5½J	189	596	250	530
	165/45R15	-	73V	XL	5½J	165	529	290	365
	155/60R15	-	74T	-	4½J/4.50B	157	567	250	375
15	185/60R15	-	84H	-	5½J	189	603	250	500
	195/60R15	-	88V	-	6J	201	615	250	560
	205/60R15	-	91V	-	6J	209	627	250	615
	185/65R15	-	88H	-	5½J	189	621	250	560
16	195/65R15	-	91V	-	6J	201	635	250	615
	205/70R15	-	96H	-	6J	209	669	250	710
	165/40R16	-	68V	-	6J	170	538	250	315
	205/55R16	-	91V	-	6½J	214	632	250	615
16	205/60R16	-	92H	-	6J	209	652	250	630
	215/65R16	-	98H	-	6½J	221	686	250	750

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	165/55R14	-	72H	-	5J	170	538	250	355
	175/65R14	-	82T	-	5.00B/5J	177	584	250	475
	175/70R14	-	88T	XL	5J	177	602	290	560
	185/60R14	-	82H	-	5½J	189	578	250	475
15	185/70R14	-	88H	-	5½J	189	616	250	560
	195/50R15	-	82V	-	6J	201	577	250	475
	195/55R15	-	85V	-	6J	201	595	250	515
	205/65R15	-	94V	-	6J	209	647	250	670
16	195/55R16	-	91V	XL	6J	201	620	290	615
	215/60R16	-	95H	-	6½J	221	664	250	690

★:coming soon

RA301

SUITABLE FOR MEDIUM AND HIGH CLASS VEHICLES

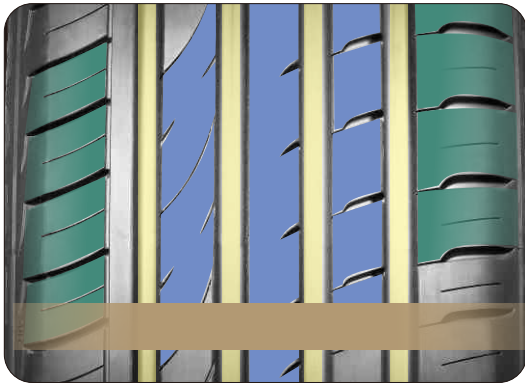

■ Asymmetric pattern design with different pitch size, number and sorting between outside and inside, reduces noise and provides excellent performance on handling and comfort.

■ Three ribs design provides excellent handling stability; many small steel sipes partially cut off rib, which reduce stiffness of rib and ensure outstanding handling and comfort performance.

■ Four wide longitudinal straight grooves with good capability of quick water drainage ensure excellent safety performance on wet road.

■ The tread formula adopts higher content of white carbon black compound design to ensure Stronger grip and safety performance of tires with handling stability enhanced.


Rim Size: 16-24
Speed Rating: H-Y
Series: 30-55

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/45R16	-	84V	XL	6½J	195	582	290	500
	205/45ZR16	-	87W	XL	7J	206	590	290	545
	195/50R16	-	88H	XL	6J	201	602	290	560
	205/50R16	-	87V	-	6½J	214	612	250	545
	225/50R16	-	92V	-	7J	233	632	250	630
	205/55R16	-	91V	-	6½J	214	632	250	615
	185/35R17	-	74V	XL	6½J	188	562	290	375
	165/40R17	-	72V	XL	6J	170	564	290	355
	195/40ZR17	-	81W	XL	7J	200	588	290	462
	205/40ZR17	-	84W	XL	7½J	212	596	290	500
17	215/40R17	-	87V	XL	7½J	218	604	290	545
	235/40ZR17	-	90W	-	8½J	241	620	250	600
	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	235/45ZR17	-	97W	XL	8J	236	644	290	730
	245/45ZR17	-	95W	-	8J	243	652	250	690
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
18	235/50ZR17	-	100W	XL	7½J	245	668	290	800
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	225/55ZR17	-	101W	XL	7J	233	680	290	825
	235/55R17	-	103V	XL	7½J	245	690	290	875
	165/35R18	-	69V	XL	6J	170	573	290	325
	185/35R18	-	83V	-	6½J	188	587	250	487
	195/35ZR18	-	88W	-	7J	200	593	250	560
	205/35R18	-	81H	XL	7½J	212	601	290	462
	205/35ZR18	-	88W	XL	7½J	212	601	290	560
	215/35ZR18	-	84W	XL	7½J	218	607	290	500
19	255/35ZR18	-	94W	XL	9J	260	635	290	670
	265/35ZR18	-	97W	XL	9½J	271	643	290	730
	165/40R18	-	73V	XL	6J	170	589	290	365
	215/40ZR18	-	85W	-	7½J	218	629	250	515
	225/40ZR18	-	92W	XL	8J	230	637	290	630
	235/40ZR18	-	95W	XL	8½J	241	645	290	690
	245/40ZR18	-	97W	XL	8½J	248	653	290	730
	215/45ZR18	-	93W	XL	7J	213	651	290	650
	225/45ZR18	-	95W	XL	7½J	225	659	290	690
	235/45ZR18	-	98W	XL	8J	236	669	290	750
20	245/45ZR18	-	100W	XL	8J	243	677	290	800
	235/50ZR18	-	97W	-	7½J	245	693	250	730
	215/55R18	-	95V	-	7J	226	693	250	690
	235/55ZR18	-	100W	-	7½J	245	715	250	800
	265/30ZR19	-	93W	XL	9½J	271	643	290	650
	275/30ZR19	-	96W	XL	9½J	278	649	290	710
	215/35ZR19	-	85W	XL	7½J	218	633	290	515
	225/35ZR19	-	88W	XL	8J	230	641	290	560
	235/35ZR19	-	91W	XL	8½J	241	647	290	615
	245/35ZR19	-	93W	XL	8½J	248	655	290	650
21	255/35R19	-	96Y	XL	9J	260	661	290	710
	225/40ZR19	-	93W	XL	8J	230	663	290	650
	245/40ZR19	-	98W	XL	8½J	248	679	290	750
	255/40ZR19	-	100W	XL	9J	260	687	290	800
	275/40ZR19	-	101W	-	9½J	278	703	250	825
	225/45ZR19	-	96W	XL	7½J	225	685	290	710
	245/45ZR19	-	102W	XL	8J	243	703	290	850
	275/45ZR19	-	108W	XL	9J	273	731	290	1000
	255/50ZR19	-	107W	XL	8J	265	739	290	975
	235/55ZR19	-	101W	-	7½J	245	741	250	825
22	275/55R19	-	111V	-	8½J	284	785	250	1090
	275/55ZR19	-	111W	-	8½J	284	785	250	1090
	205/30ZR20	-	82W	XL	7½J	212	632	290	475
	215/30ZR20	-	82W	-	7½J	218	638	250	475
	225/30ZR20	-	85W	XL	8J	230	644	290	515
	275/30ZR20	-	97W	XL	9½J	278	674	290	730
	205/35R20	-	84V	-	7½J	212	652	250	500
	225/35ZR20	-	90W	XL	8J	230	666	290	600
	225/35ZR20	-	93W	XL	8J	230	666	290	650
	245/35ZR20	-	95W	XL	8½J	248	680	290	690
23	255/35ZR20	-	97W	XL	9J	260	686	290	730
	315/35ZR20	-	110W	XL	11J	320	728	290	1060
	245/40ZR20	-	99W	XL	8½J	248	704	290	775
	275/40ZR20	-	106W	XL	9½J	278	728	290	950
	245/45ZR20	-	103W	XL	8J	243	728	290	875
	275/45R20	-	110V	XL	9J	273	756	290	1060
	265/50R20	-	111V	XL	8½J	277	774	290	1090
	285/50R20	-	112V	-	9J	297	794	250	1120
	275/55R20	-	117H	XL	8½J	284	810	290	1285
	295/35ZR21	-	107W	XL	10½J	301	739	290	975
24	265/35R22	-	102V	XL	9½J	271	745	290	850
	305/40R22	-	114V	XL	11J	313	803	290	1180
25	305/35R24	-	112V	XL	11J	313	824	290	1120

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/45R16	-	84V	XL	6½J	195	582	290	500
	205/45ZR16	-	87W	XL	7J	206	590	290	545
	195/50R16	-	88H	XL	6J	201	602	290	560
	205/50R16	-	87V	-	6½J	214	612	250	545
	225/50R16	-	92V	-	7J	233	632	250	630
	205/55R16	-	91V	-	6½J	214	632	250	615
	185/35R17	-	74V	XL	6½J	188	562	290	375
	165/40R17	-	72V	XL	6J	170	564	290	355
	195/40ZR17	-	81W	XL	7J	200	588	290	462
	205/40ZR17	-	84W	XL	7½J	212	596	290	500
17	215/40R17	-	87V	XL	7½J	218	604	290	545
	235/40ZR17	-	90W	-	8½J	241	620	250	600
	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	235/45ZR17	-	97W	XL	8J	236	644	290	730
	245/45ZR17	-	95W	-	8J	243	652	250	690
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
18	235/50ZR17	-	100W	XL	7½J	245	668	290	800
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	225/55ZR17	-	101W	XL	7J	233	680	290	825
	235/55R17	-	103V	XL	7½J	245	690	290	875
	165/35R18	-	69V	XL	6J	170	573	290	325
	185/35R18	-	83V	-	6½J	188	587	250	487
	195/35ZR18	-	88W	-	7J	200	593	250	560
	205/35R18	-	81H	XL	7½J	212	601	290	462
	205/35ZR18	-	88W	XL	7½J	212	601	290	560
	215/35ZR18	-	84W	XL	7½J	218	607	290	500
19	255/35ZR18	-	94W	XL	9J	260	635	290	670
	265/35ZR18	-	97W	XL	9½J	271	643	290	730
	165/40R18	-	73V	XL	6J	170	589	290	365
	215/40ZR18	-	85W	-	7½J	218	629	250	515
	225/40ZR18	-	92W	XL	8J	230	637	290	630
	235/40ZR18	-	95W	XL	8½J	241	645	290	690
	245/40ZR18	-	97W	XL	8½J	248	653	290	730
	215/45ZR18	-	93W	XL	7J	213	651	290	650
	225/45ZR18	-	95W	XL	7½J	225	659	290	690
	235/45ZR18	-	98W	XL	8J	236	669	290	750
20	245/45ZR18	-	100W	XL	8J	243	677	290	800
	235/50ZR18	-	97W	-	7½J	245	693	250	730
	215/55R18	-	95V	-	7J	226	693	250	690
	235/55ZR18	-	100W	-	7½J	245	715	250	800
	265/30ZR19	-	93W	XL	9½J	271	643	290	650
	275/30ZR19	-	96W	XL	9½J	278	649	290	710
	215/35ZR19	-	85W	XL	7½J	218	633	290	515
	225/35ZR19	-	88W	XL	8J	230	641	290	560
	235/35ZR19	-	91W	XL	8½J	241	647	290	615
	245/35ZR19	-	93W	XL	8½J	248	655	290	650
21	255/35R19	-	96Y	XL	9J	260	661	290	710

RA342

SUITABLE FOR MEDIUM AND HIGH CLASS VEHICLES

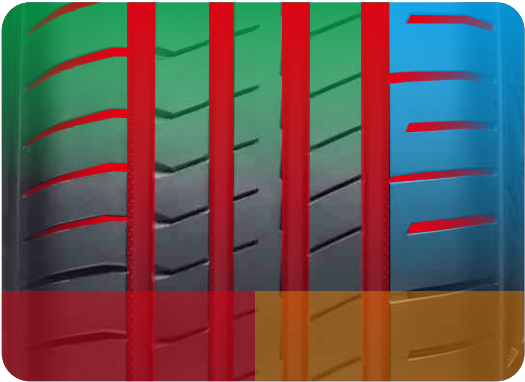

NEW ASYMMETRIC
SPORTS PATTERN DESIGN

- The use of wide grooves on the inner side gives the tires excellent land to sea ratio;The outer side uses a rigid tire block design,providing excellent dry grip.
- Unique longitudinal grooves,combined with wide lateral diversion grooves,achieve efficient drainage and safer operation.

ENVIRONMENTAL
PROTECTION AND SAFETY

- The tread is designed with FET high silicon content formula,which has lower rolling resistance,more energy saving and environmental protection.

EXCELLENT INSTANTANEOUS
RESPONSE CAPABILITY

- High-strength nylon composite cladding enables steering wheel instructions to be quickly and accurately communicated to the tire,with precise instantaneous response to corners.
- Uniform tire ground pressure distribution provides ultimate grip and handling,while making the tires more durable.

Rim Size: 17-21
Speed Rating: H-W
Series: 40-55

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	205/40ZR17	-	84W	XL	7½J	212	596	290	500
	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	225/40ZR18	-	92W	XL	8J	230	637	290	630
	235/40ZR18	-	95W	XL	8½J	241	645	290	690
18	245/40ZR18	-	97W	XL	8½J	248	653	290	730
	225/45ZR18	-	95W	XL	7½J	225	659	290	690
	235/45ZR18	-	98W	XL	8J	236	669	290	750
	245/45ZR18	-	100W	XL	8J	243	677	290	800
	235/50ZR18	-	97W	-	7½J	245	693	250	730
19	235/55ZR19	-	101W	-	7½J	245	741	250	825
20	245/45ZR20	-	103W	XL	8J	243	728	290	875
	265/50R20	-	111V	XL	8½J	277	774	290	1090

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/45R16	-	84V	XL	6½J	195	582	290	500
	195/50R16	-	88V	XL	6J	201	602	290	560
	205/45ZR16	-	87W	XL	7J	206	590	290	545
17	225/55ZR17	-	101W	XL	7J	233	680	290	825
	235/45ZR17	-	97W	XL	8J	236	644	290	730
	235/55R17	-	103V	XL	7½J	245	690	290	875
18	205/40ZR18	-	86W	XL	7½J	212	612	290	530
	215/45ZR18	-	93W	XL	7J	213	651	290	650
	205/55R19	-	97V	XL	6½J	214	709	290	730
19	225/40ZR19	-	93W	XL	8J	230	663	290	650
	225/45ZR19	-	96W	XL	7½J	225	685	290	710
	245/40ZR19	-	98W	XL	8½J	248	679	290	750
	245/45ZR19	-	102W	XL	8J	243	703	290	850
20	195/55R20	-	95H	XL	6J	201	722	290	690
21	255/40ZR21	-	102W	XL	9J	260	737	290	850

★:coming soon



RA302

SUITABLE FOR MEDIUM AND HIGH CLASS VEHICLES




Top-level Protection for Utmost Safety
Outstanding performance Safe and efficient

APTANY sidewall support enhancement technology can keep the vehicle traveling at a certain speed for a certain distance after the tire loses pressure. (When the pressure drops to 0 kPa, the vehicle can travel a distance of 80 km to 150 km at a speed of less than 80 km/h under normal use conditions).

Rim Size: 16-19
Speed Rating: V-W
Series: 35-55

[Pattern Features]

Inner tread Asymmetrical tread design Outer tread

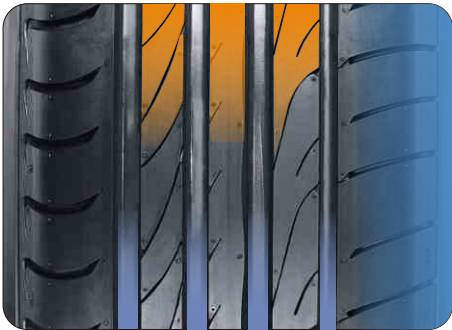


DYNAMIC CONTROL

The narrow longitudinal center tread provides a larger contact area and its good cornering ability gives excellent control on dry roads.

WATER EXPELLING TREAD


The staggered height of the central tread enhances wet grip. Internal tread enhances water dispersion.

The sidewalls feature advanced non-deformation technology greatly improves compression performance and effectively resists deformation from internal traction caused by air leakage from all four tires.




Special Sidewall Materials

Unique creative rubber materials with excellent heat resistance are used to provide sufficient rigidity to the sidewalls of the tire to prevent loss of vehicle control due to pressure loss if the tire is punctured.



RFT technology (APTANY sidewall support enhancement technology)

It uses advanced sidewall structure to prevent deformation and maximize the sidewall pressure resistance through a computer simulation system, thus effectively resisting the deformation of the tire's internal tension and traction caused by a flat tire leak.



Special Sidewall Materials

The optimized tire bead component can optimize the stress distribution between the tire and the rim, thus effectively avoiding the tire unseating problem when the tire falls off.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/55RF16	-	87V	-	6J	201	620	250	545
	205/55RF16	-	91V	-	6½J	214	632	250	615
	225/55RF16	-	95V	-	7J	233	654	250	690
17	205/45ZRF17	-	84W	-	7J	206	616	250	500
	225/45ZRF17	-	91W	-	7½J	225	634	250	615
	205/50ZRF17	-	89W	-	6½J	214	638	250	580
	225/50ZRF17	-	94W	-	7J	233	658	250	670
	225/55ZRF17	-	97W	-	7J	233	680	250	730
	235/55ZRF17	-	99W	-	7½J	245	690	250	775
18	245/35ZRF18	-	88Y	-	8½J	248	629	250	560
	225/40ZRF18	-	88W	-	8J	230	637	250	560
	255/40ZRF18	-	95W	-	9J	260	661	250	690
	275/40ZRF18	-	99W	-	9½J	278	677	250	775
	225/45ZRF18	-	91W	-	7½J	225	659	250	615
	245/45ZRF18	-	96W	-	8J	243	677	250	710

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	245/45ZRF18	-	96W	-	8J	243	677	250	710
	225/50RF18	-	95V	-	7J	233	683	250	690
	235/50RF18	-	97V	-	7½J	245	693	250	730
	245/50ZRF18	-	100W	-	7½J	253	703	250	800
19	215/55RF18	-	95V	-	7J	226	693	250	690
	235/55RF18	-	100V	-	7½J	245	715	250	800
	255/55RF18	-	105V	-	8J	265	737	250	925
	275/35ZRF19	-	96W	-	9½J	278	675	250	710
	245/40ZRF19	-	94W	-	8½J	248	679	250	670
	275/40ZRF19	-	101W	-	9½J	278	703	250	825
19	245/45ZRF19	-	98W	-	8J	243	703	250	750
	285/45RF19	-	107V	-	9½J	285	739	250	975
	255/50RF19	-	103V	-	8J	265	739	250	875




RL106
SUITABLE FOR BUSINESS VEHICLES



High Mileage Anti-load and
Wear-resistance

Rim Size: 12-16
Speed Rating: N-T
Series: 60-85

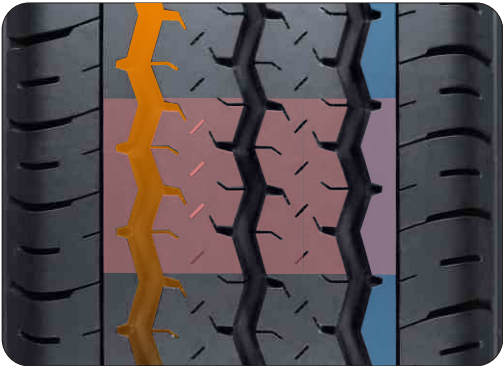

WATER REPELLING TIRE TREAD

■ Efficient water expulsion,ensures safety on wet slippery surfaces.

CENTRAL TREAD PATTERN

■ Enhances tire performance and lifespan.

CLOSED TREAD

■ Enhances tire casing stability, enhances grip, enhances dynamic acceleration.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
12	155R12C	8	88/86N	-	4½J	157	553	450	560
	165/70R13C	6	88/86S	-	5J	170	562	375	560
13	155R13C	6	85/83R	-	4½J/4.50B	157	578	350	515
	165R13C	6	91/89S	-	4½J/4.50B	167	596	375	615
	175R13C	8	97/95R	-	5.00B/5J	177	610	450	730
	175/65R14C	6	90/88T	-	5J	177	584	375	600
14	165/70R14C	6	89/87R	-	5J	170	588	375	580
	175/70R14C	6	95/93T	-	5J	177	602	375	690
	175/75R14C	8	99/98S	-	5J	177	618	475	775
	165R14C	8	96/95T	-	4½J	165	620	450	710
	175R14C	8	99/98R	-	5J	178	634	450	775
	185R14C	8	102/100R	-	5½J	188	650	450	850
	195R14C	8	106/104R	-	5½J	198	666	450	950
	215/65R15C	6	104/102T	-	6½J	221	661	375	900
	195/70R15C	8	104/102R	-	6J	201	655	450	900
	205/70R15C	8	106/104R	-	6J	209	669	450	950
15	215/70R15C	8	109/107S	-	6½J	221	683	450	1030
	225/70R15C	8	106/103R	-	6½J	228	697	450	950
	225/70R15C	8	112/110R	-	6½J	228	697	450	1120
	185R15C	8	103/102R	-	5½J	188	674	450	875
	195R15C	8	106/104N	-	5½J	198	690	450	950
	195R15C	8	106/104S	-	5½J	198	690	450	950

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/60R16C	6	99/97H	-	6J	201	640	375	775
	215/60R16C	8	108/106T	-	6½J	221	664	475	1000
	195/65R16C	8	104/102T	-	6J	201	660	475	900
	205/65R16C	8	107/105T	-	6J	209	672	475	975
	215/65R16C	8	109/107T	-	6½J	221	686	475	1030
16	225/65R16C	8	112/110R	-	6½J	228	698	475	1120
	235/65R16C	8	115/113T	-	7J	240	712	475	1215
	215/70R16C	6	108/106T	-	6½J	221	708	375	1000
	185/75R16C	8	104/102R	-	5J	184	684	475	900
	195/75R16C	8	107/105T	-	5½J	196	698	475	975
	195/75R16C	10	110/108T	-	5½J	196	698	525	1060
	205/75R16C	10	113/111R	-	5½J	203	714	525	1150
	215/75R16C	10	116/114R	-	6J	216	728	525	1250
	215/75R16C	10	116/114S	-	6J	216	728	525	1250
	225/75R16C	10	121/120R	-	6J	223	744	575	1450
16	235/85R16C	8	114/111S	-	6½J	235	806	475	1180
	225/55R17C	8	109/107T	-	7J	233	680	475	1030


★:coming soon



RU025
SUITABLE FOR URBAN SUV



Rim Size: 15-22
Speed Rating: T-W
Series: 30-70

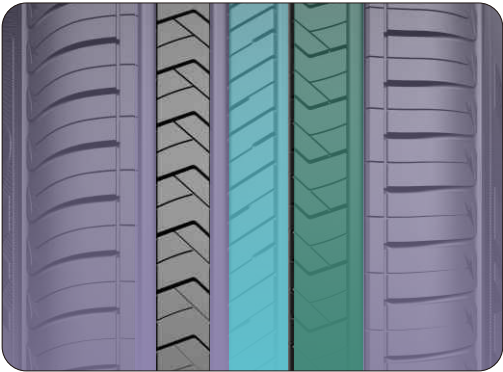

MORE QUIET AND
COMFORTABLE EXPERIENCE

- The closed shoulder groove design helps to reduce the noise.
- The subsidiary groove design can reduce the rigidity of the pattern block, which provides comfortable performance.
- Optimized sequence structure can reduce the noise effectively.

UPGRADED AND MORE
ENVIRONMENTAL-FRIENDLY FORMULA

- Enhanced tire traction and reduced rolling resistance with the special high silicon formula.

OUTSTANDING CONTROL ON DRY
AND WET GROUNDS

- The shoulder pattern use thin chamfer design, which can prevent pebbles trapping conditions. The thin grooves on the tread provide excellent wet drainage and handling stability. Four wide main grooves on the tread provide good drainage and contribute to wetland security.

Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	235/75R15	-	105T	-	6½J	235	733	250	925
	235/60R16	-	100V	-	7J	240	688	250	800
	215/70R16	-	100H	-	6½J	221	708	250	800
	225/70R16	-	103H	-	6½J	228	722	250	875
16	235/70R16	-	106H	-	7J	240	736	250	950
	245/70R16	-	107H	-	7J	248	750	250	975
	265/70R16	-	112T	-	8J	272	778	250	1120
	275/70R16	-	114T	-	8J	279	792	250	1180
17	215/60R17	-	96V	-	6½J	221	690	250	710
	225/60R17	-	99V	-	6½J	228	702	250	775
	235/60R17	-	102H	-	7J	240	714	250	850
	255/60R17	-	106H	-	7½J	260	738	250	950
18	225/65R17	-	102V	-	6½J	228	724	250	850
	235/65R17	-	104H	-	7J	240	738	250	900
	245/65R17	-	111T	XL	7J	248	750	290	1090
	265/65R17	-	112T	-	8J	272	776	250	1120
19	285/65R17	-	116H	-	8½J	292	802	250	1250
	245/70R17	-	110T	-	7J	248	776	250	1060
	265/70R17	-	115T	-	8J	272	804	250	1215
	235/50ZR18	-	101W	XL	7½J	245	693	290	825
20	225/55R18	-	98V	-	7J	233	705	250	750
	235/55R18	-	100V	-	7½J	245	715	250	800
	225/60R18	-	104V	XL	6½J	228	727	290	900

Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	235/60R18	-	107V	XL	7J	240	739	290	975
	245/60R18	-	105H	-	7J	248	751	250	925
	265/60R18	-	114H	XL	8J	272	775	290	1180
	285/60R18	-	116H	-	8½J	292	799	250	1250
19	265/65R18	-	114H	-	8J	272	801	250	1180
	275/65R18	-	116T	-	8J	279	815	250	1250
	255/70R18	-	113T	-	7½J	260	815	250	1150
	265/70R18	-	116H	-	8J	272	829	250	1250
20	235/40ZR19	-	96W	XL	8½J	241	671	290	710
	235/55R19	-	101V	-	7½J	245	741	250	825
	275/40ZR20	-	106W	XL	9½J	278	728	290	950
	245/45ZR20	-	103W	XL	8J	243	728	290	875
21	285/50R20	-	116V	XL	9J	297	794	290	1250
	235/55R20	-	102V	-		245	766	250	850
	275/55R20	-	117V	XL	8½J	284	810	290	1285
	275/60R20	-	115H	-	8J	279	838	250	1215
22	285/30R21	-	100W	XL	10J	290	705	290	800
	245/35R21	-	96W	XL	8½J	248	705	290	710
	265/45R21	-	104W	-	9J	266	771	250	900
	275/50R21	-	113W	XL	8½J	284	809	290	1150
23	275/40ZR22	-	107W	XL	9½J	278	779	290	975
	285/45R22	-	114V	XL	9½J	285	815	290	1180
	275/50R22	-	111V	-	8½J	284	835	250	1090




RU158
SUITABLE FOR PICK-UP TRUCKS



ALL-TERRAIN ABILITY FREELY DRIVES

Rim Size:	15-18
Speed Rating:	R-H
Series:	60-70

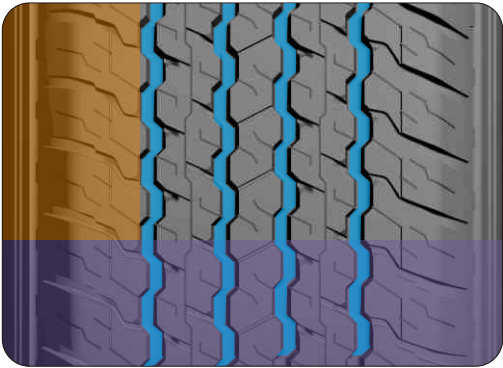

**IMPROVED COMFORTABLE
EXPERIENCE**

■ Tread : Optimized pitch sequence arrangement, multi-pitch design for noise reduction. Numerous evenly distributed knife groove pattern design reduces the rigidity of tread pattern blocks and improves driving comfort.

■ Tire shoulder : Closed groove design on the shoulder reduces resonance of columnar airflow and noise.

**BETTER HANDLING ON
VARIOUS ROAD CONDITIONS**

■ Four wide zigzag-shaped grooves bring excellent water-displacement ability, evenly spread stress across the tread, improve traction on mud ground and reduce the chance of gravels being struck in the tread.

STRONGER AND LONG MILEAGE

■ The tread uses materials and ingredients designed for good wear-resisting and anti-tearing performance, thus the tread can defend against impacts from flying gravels and prolong tire's service life. Together with enhanced carcass and bead, tire's load-carrying capacity is greatly improved.


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	255/70R15C	6	112/110S	-	7½J	260	739	375	1120
	265/70R16	-	112S	-	8J	272	778	250	1120
16	275/70R16	-	114H	-	8J	279	792	250	1180
	205R16C	6	106/104R	-	6J	208	734	350	950
17	265/65R17	-	112T	-	8J	272	776	250	1120

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
	275/65R17	-	115H	-	8J	279	790	250	1215
17	285/65R17	-	116H	-	8½J	292	802	250	1250
	265/70R17	-	115S	-	8J	272	804	250	1215
	265/60R18	-	110H	-	8J	272	775	250	1060
18	285/60R18	-	116H	-	8½J	292	799	250	1250



RU006

SUITABLE FOR MID-LARGE SUV & OFF-ROAD VEHICLES

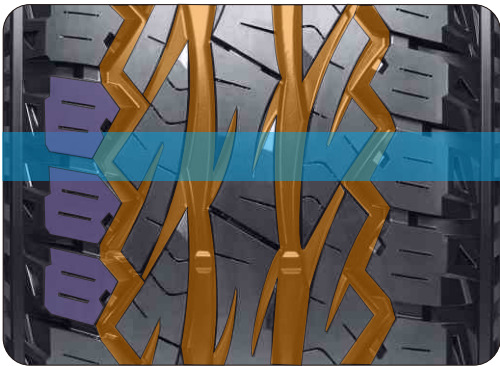

- Tiger-teeth tread pattern provides excellent grip with great mountain and off-road performance.
- The main structure consists of two inner water expelling treads and two outer water expelling treads, providing excellent water expelling performance on mud and wet road conditions.

- Special 3D water expelling tread with enhanced structure prevents stress concentration on the tread and pebbles trapping conditions.

INTERLEAVING SHOULDER TREAD PATTERN AND ARMOR SIDEWALL

- Guarantees exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

3D SHOULDER DESIGN

- For exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94H	-	6J	209	647	250	670
	205/70R15	-	96H	-	6J	209	669	250	710
	215/75R15LT	6	100/97S	-	6J	216	703	350	800
	31x10.50R15LT	6	109Q	-	8½J	268	775	350	1030
16	205/60R16	-	92H	-	6J	209	652	250	630
	235/70R16	-	106S	-	7J	240	736	250	950
	245/70R16	-	111T	XL	7J	248	750	290	1090
	255/70R16	-	111T	-	7½J	260	764	250	1090
17	265/65R17	-	112S	-	8J	272	778	250	1120
	275/65R17	-	114S	-	8J	279	792	250	1180
	LT245/75R16	6	108/104S	-	7J	248	774	350	1000
	LT265/75R16	10	123/120S	-	7½J	267	804	550	1550

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	265/65R17	-	112S	-	8J	272	776	250	1120
	275/65R17	-	115S	-	8J	279	790	250	1215
	285/65R17	-	116S	-	8½J	292	802	250	1250
18	LT265/70R17	10	121/118S	-	8J	272	804	550	1450
	265/60R18	-	110H	-	8J	272	775	250	1060
	285/60R18	-	116H	-	8½J	292	799	250	1250
20	265/50R20	-	111V	XL	8½J	277	774	290	1090
	275/55R20	-	117H	XL	8½J	284	810	290	1285

Rim Size: 15-20
Speed Rating: Q-V
Series: 50-75



RU042
ALL-ROAD OFF-ROAD VEHICLES



Rim Size: 15-16
Speed Rating: S-H
Series: 60-75




TREAD SELF-CLEANING TECHNOLOGY, NO FEAR OF SAND

■ The tread is designed with three-dimensional sand-removing stone stepped grooves and reinforcing ribs to prevent stress concentration on the tread, effectively prevent gravel inclusion and avoid tire damage due to gravel inclusion.

GRASP THE GROUND STRONGLY AND DEAL WITH ALL KINDS OF ROAD CONDITION EASILY.

■ The rough block pattern of "butterfly" arrangement provides strong grip and ensures the off-road performance of tires in complex road conditions. Staggered serrated shoulder flowers ensure the handling performance of tires on unpaved roads.



THE BODY OF KING KONG, GUARDING IN ALL DIRECTIONS.

- 1. Tread: adopt high wear-resistant and tear-resistant formula, puncture-resistant;
- 2. Carcass: with double-layer carcass skeleton structure, stronger;
- 3. Sidewall: 3D peak design can effectively resist external impact; Three-pronged approach, casting the body of King Kong.
- The tires are stronger, more wear-resistant, and safer to drive without fear of pricking.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94H	-	6J	209	647	250	670
	205/70R15	-	96H	-	6J	209	669	250	710
	235/75R15	-	109T	XL	6½J	235	733	290	1030
	31×10.50R15LT	6	109S	-	8½J	268	775	350	1030

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	205/60R16	-	92H	-	6J	209	652	250	630
	235/70R16	-	106T	-	7J	240	736	250	950
	245/70R16	-	111T	XL	7J	248	750	290	1090
	255/70R16	-	111T	-	7½J	260	764	250	1090
	265/70R16	-	112T	-	8J	272	778	250	1120



RU149
SUITABLE FOR OFF-ROAD CARS



Rim Size: 16-22
Speed Rating: Q-T
Series: 55-75



ROUGH PATTERNS, NOT AFRAID OF MOUNTAIN CHALLENGES

■ Unique double-wide, zigzag self-cleaning main ditch, excellent drainage capacity of wetland; With open shoulder block design, it provides strong traction and lateral stability, and has stronger grip on muddy and sandy roads.

STRONGER AND MORE DURABLE

■ The tread adopts customized formula with high wear resistance and tear resistance, which can effectively resist the impact of pavement sand and prolong the service life. Combined with the reinforced carcass and bead design, the carcass is solid, which greatly improves the load resistance of the tire.

ACTIVE NOISE REDUCTION TO IMPROVE DRIVING COMFORT

■ The unique design of shuttle X armor central tread pattern can not only effectively improve the puncture resistance, but also optimize the grounding cut-in angle. Combined with the multi-directional zigzag groove active noise reduction technology, the resonance of columnar airflow is reduced, and the pitch arrangement of the whole tread is optimized to reduce the passing noise and improve the driving comfort.



■ Three-dimensional white design beside flowers shows a variety of visual experiences.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	245/70R16LT	8	113/110S	-	7J	248	750	450	1150
	265/70R16LT	8	117/114Q	-	8J	272	778	450	1285
	LT245/75R16	10	120/116S	-	7J	248	774	550	1380
17	265/65R17LT	10	120/117Q	-	8J	272	776	550	1400
	245/70R17LT	10	119/116S	-	7J	248	776	550	1360
	LT265/70R17	10	121/118S	-	8J	272	804	550	1450

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	265/60R18LT	10	119/116Q	-	8J	272	775	550	1360
20	275/55R20		117T	XL	8½J	284	810	290	1285
	33×12.50R20LT	10	114Q	-	10J	318	832	450	1180
	33×12.50R22LT	10	109Q	-	10J	318	832	450	1030



RM105
SUITABLE FOR OFF-ROAD CARS



- The powerful profile design provides superior driving performance and grip capability. Skid resistance ensures outstanding performance in mud and unpaved road.
- Open shoulder design provides more powerful grip and traction.
- Evenly distributed grooves provide excellent wet driving performance and braking performance.
- Leading anti-wear compound reduces wear and longer life span.

Rim Size: 15-22
Speed Rating: K-S
Series: 65-75

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	LT235/75R15	6	104/101S	-	6½J	235	739	350	900
	30×9.50R15LT	6	104Q	-	7½J	240	756	350	900
	31×10.50R15LT	6	109Q	-	8½J	268	781	350	1030
	32×11.50R15LT	6	113Q	-	9J	290	807	350	1150
16	LT265/70R16	8	117/114Q	-	8J	272	784	450	1285
	LT245/75R16	6	108/104Q	-	7J	248	780	350	1000
	LT265/75R16	10	123/120Q	-	7½J	267	810	550	1550
	LT265/70R17	10	121/118Q	-	8J	272	810	550	1450
17	LT285/70R17	10	121/118R	-	8½J	292	838	550	1450
	LT295/70R17	10	121/118Q	-	8½J	299	852	550	1320
	35×12.50R17LT	10	121Q	-	10J	318	883	450	1450

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	LT285/65R18	10	125/122Q	-	8½J	292	833	550	1650
	33×12.50R18LT	10	118Q	-	10J	318	832	450	1320
	35×12.50R18LT	8	118Q	-	10J	318	883	350	1320
20	LT275/65R20	10	126/123Q	-	8J	279	872	550	1700
	33×12.50R20LT	10	114Q	-	10J	318	832	450	1180
	35×12.50R20LT	10	121Q	-	10J	318	883	450	1450
	37×13.50R20LT	10	127Q	-	11J	345	934	450	1750
22	33×12.50R22LT	10	109Q	-	10J	318	832	450	1030
	35×12.50R22LT	10	117Q	-	10J	318	883	450	1285
	37×13.50R22LT	10	123K	-	11J	345	934	450	1550



SPORT RACING
SUITABLE FOR RACING CARS SPORTS CARS



KNURLING-DESIGNED GROOVES

■ Enlarged drainage grooves with knurling pattern designed at the bottom expedite drainage, improving safety performance during rainy days.

LARGE CENTER RUBBER BAR WITH SMALL TRAPS

■ Insures the performance of straight driving, and effectively breaks the water film increasing the grip on wet ground.

BIG-SHOULDER DESIGN

■ Bigger shoulder design brings more tire-road contact and less tread deformation. Tiny steel on tire shoulder strengthens the grip during cornering.

COMPETITIVE PATTERN

■ Competitive pattern with wide tread sharply increases the tire-road contact, making better grip and steering force during cornering.

DOUBLE LONGITUDINAL PATTERN

■ Main pattern in center ensures the stability during high-speed straight driving. Exterior pattern provides strong grip during rapid cornering with its hard-enough exterior parts.


Rim Size:	15-18
Speed Rating:	V-W
Series:	35-60

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/50R15	-	82W	-	6J	201	577	250	475
	195/55R15	-	85V	-	6J	201	595	250	515
	235/40R17	-	90W	-	8½J	241	620	250	600
17	215/45R17	-	91W	XL	7J	213	626	290	615
	235/45R17	-	94W	-	8J	236	644	250	670
	265/35R18	-	97W	XL	9½J	271	643	290	730
18	285/35R18	-	101W	XL	10J	290	657	290	825
	225/40R18	-	88W	-	8J	230	637	250	560

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	235/40R18	-	91W	-	8½J	241	645	250	615
	245/40R18	-	93W	-	8½J	248	653	250	650
	275/40R18	-	103W	XL	9½J	278	677	290	875
	245/45R18	-	100W	XL	8J	243	677	290	800
18	255/50R18	-	106V	XL	8J	265	713	290	950
	265/50R18	-	103W	-	8½J	277	722	250	875
	255/55R18	-	109V	XL	8J	265	737	290	1030
	265/60R18	-	114V	XL	8J	272	775	290	1180



RC501
SUITABLE FOR ALL SERSON

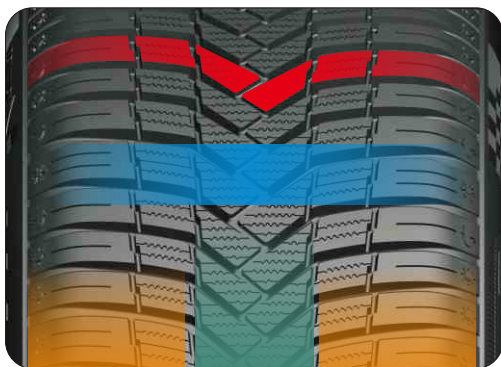

■ Single directional pattern gives excellent stability at high speed, stronger snow expelling and water drainage performance.

■ Massive quantity of transverse grooves strengthen performance in snow expelling , water drainage and other indexes including anti-wear, braking, controlling and noise.

■ Narrow Circumferential groove and wider contact surface help to enhance tire grip and safety on wet roads.

■ Large quantity of tiny steel straps in the middle guarantee good performance on snow and small amount of steel design on the shoulder ensures excellent performance on dry and wet roads.

Double layer tread along with all season formula decreases rolling resistance, tire weight and optimizes performance on dry and wet roads.

Low noise design is achieved by noise optimization software with regards to pitch misalignment and sequence.

NEW PATTERN DESIGNED FOR
BALANCING PERFORMANCE AND
QUIET DRIVING

Rim Size: 13-20
Speed Rating: H-Y
Series: 35-80

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75T	-	4½J	157	548	250	387
	165/70R13	-	79T	-	5J	170	562	250	437
	155/80R13	-	79T	-	4.50B/4½J	157	578	240	437
14	185/60R14	-	82H	-	5½J	189	578	250	475
	155/65R14	-	75T	-	4.50B/4½J	157	558	250	387
	175/65R14	-	82T	-	5J	177	584	250	475
15	165/70R14	-	81T	-	5J	170	588	250	462
	175/70R14	-	88T	XL	5J	177	602	290	560
	195/50R15	-	82V	-	6J	201	577	250	475
16	185/55R15	-	86H	XL	6J	194	585	290	530
	185/60R15	-	88H	XL	5½J	189	603	290	560
	195/60R15	-	88H	-	6J	201	615	250	560
17	175/65R15	-	84H	-	5J	177	609	250	500
	185/65R15	-	88H	-	5½J	189	621	250	560
	195/65R15	-	91H	-	6J	201	635	250	615
18	195/65R15	-	95H	XL	6J	201	635	290	690
	215/65R15	-	96H	-	6½J	221	661	250	710
	195/45R16	-	84V	XL	6½J	195	582	290	500
19	215/45R16	-	90V	XL	7J	213	600	290	600
	195/55R16	-	91V	XL	6J	201	620	290	615
	205/55R16	-	91V	-	6½J	214	632	250	615
20	205/55R16	-	94V	XL	6½J	214	632	290	670
	215/55R16	-	97V	XL	7J	226	642	290	730
	205/60R16	-	96V	XL	6J	209	652	290	710
21	215/70R16	-	100H	-	6½J	221	708	250	800
	205/45Z17	-	88W	XL	7J	206	616	290	560
	215/45Z17	-	91W	XL	7J	213	626	290	615
22	225/45Z17	-	94W	XL	7½J	225	634	290	670
	235/45Z17	-	97W	XL	8J	236	644	290	730
	245/45Z17	-	99W	XL	8J	243	652	290	775
23	205/50Z17	-	93W	XL	6½J	214	638	290	650
	215/50Z17	-	95W	XL	7J	226	648	290	690
	225/50Z17	-	98W	XL	7J	233	658	290	750
24	215/55Z17	-	98W	XL	7J	226	668	290	750
	225/55Z17	-	101W	XL	7J	233	680	290	825
	235/55Z17	-	103W	XL	7½J	245	690	290	875
25	215/60R17	-	100V	XL	6½J	221	690	290	800
	225/40Z18	-	92W	XL	8J	230	637	290	630
	225/45R18	-	95V	XL	7½J	225	659	290	690
26	215/55R18	-	99V	XL	7J	226	693	290	775

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	185/55R14	-	80H	-	6J	194	560	250	450
	165/60R14	-	79H	XL	5J	170	554	290	437
	165/65R14	-	79T	-	5J	170	570	250	437
15	185/65R14	-	86H	-	5½J	189	596	250	530
	195/55R15	-	85V	-	6J	201	595	250	515
	165/60R15	-	81H	XL	5J	170	579	290	462
16	165/65R15	-	81H	-	5J	170	595	250	462
	205/65R15	-	94V	-	6J	209	647	250	670
	205/45Z16	-	87W	XL	7J	206	590	290	545
17	185/50R16	-	81V	-	6J	194	592	250	462
	195/50R16	-	88V	XL	6J	201	602	290	560
	185/55R16	-	87V	XL	6J	194	610	290	545
18	225/55Z16	-	99W	XL	7J	233	654	290	775
	215/60R16	-	99V	XL	6½J	221	664	290	775
	215/65R16	-	102V	XL	6½J	221	686	290	850
19	215/40R17	-	87V	XL	7½J	218	604	290	545
	205/55Z17	-	95W	XL	6½J	214	658	290	690
	225/60R17	-	103V	XL	6½J	228	702	290	875
20	225/65R17	-	106V	XL	6½J	228	724	290	950
	235/65Z17	-	108W	XL	7J	240	738	290	1000
	215/40Z18	-	89W	XL	7½J	218	629	290	580
21	235/40Z18	-	95Y	XL	8½J	241	645	290	690
	245/40Z18	-	97W	XL	8½J	248	653	290	730
	215/45R18	-	93V	XL	7J	213	651	290	650
22	235/45Z18	-	98Y	XL	8J	236	669	290	750
	245/45Z18	-	100W	XL	8J	243	677	290	800
	215/50Z18	-	92W	-	7J	226	673	250	630
23	225/50Z18	-	99W	XL	7J	233	683	290	775
	235/50Z18	-	101W	XL	7½J	245	693	290	825
	225/55R18	-	98V	-	7J	233	705	250	750
24	235/55R18	-	104V	XL	7½J	245	715	290	900
	225/60R18	-	104V	XL	6½J	228	727	290	900
	235/60R18	-	107V	XL	7J	240	739	290	975
25	235/35Z19	-	91Y	XL	8½J	241	647	290	615
	255/35Z19	-	96Y	XL	9J	260	661	290	710
	225/40Z19	-	93Y	XL	8J	230	663	290	650
26	235/40Z19	-	96Y	XL	8½J	241	671	290	710
	245/40Z19	-	98Y	XL	8½J	248	679	290	750
	225/45Z19	-	96Y	XL	7½J	225	685	290	710
27	235/45Z19	-	99Y	XL	8J	236	695	290	775
	245/45Z19	-	102W	XL	8J	243	703	290	850
	235/50R19	-	99V	-	7½J	245	719	290	875
28	255/50R19	-	107V	XL	8J	265	739	290	975
	205/55Z19	-	97W	XL	6½J	214	709	290	730
	225/55R19	-	99V	-	7J	233	731	250	775
29	235/55Z19	-	105W	XL	7½J	245	741	290	925
	235/35Z20	-	92W	XL	8½J	241	672	290	630
	255/45Z20	-	105W	XL	8½J	255	738	290	925
30	195/55R20	-	95H	XL	6J	201	722	290	690

★:coming soon

RC513
SUITABLE FOR COMMERCIAL LIGHT TRUCKS



REINFORCED CARCASS,THE BETTER
LOAD-BEARING PERFORMANCE

■ Designed for commercial light truck with double carcass structure, it has better load-bearing performance.

SUPERIOR WETLAND PERFORMANCE
AND SKID RESISTANCE

- The tread groove design with s shape on both sides and z shape in the middle which can greatly enhance the tire drainage performance.
- The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on icy and wet road .

EXCELLENT FOUR SEASONS
ADAPTABILITY PERFORMANCE

■ Bring excellent performance to the Tire no matt er in Spring, Summer, Autumn or Winter, by using special All-season tire compound.



Pattern joint



The shape of
groovelike "T"



Have the difference
between high and low
at the edge of shoulder



The more close
pattern groove

Rim Size: 15-16
Speed Rating: R-T
Series: 65-75

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/70R15C	8	104/102R	-	6J	201	655	450	900
	215/70R15C	8	109/107R	-	6½J	221	683	450	1030
16	195/65R16C	8	104/102T	-	6J	201	660	475	900
	205/65R16C	8	107/105R	-	6J	209	672	475	975
	215/65R16C	8	109/107R	-	6½J	221	686	475	1030

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	225/65R16C	8	112/110R	-	6½J	228	698	475	1120
	235/65R16C	8	115/113R	-	7J	240	712	475	1215
16	195/75R16C	8	107/105T	-	5½J	196	698	475	975
	215/75R16C	8	113/111R	-	6J	216	728	475	1150
	225/75R16C	10	121/120R	-	6J	223	744	575	1450



RW211
SUITABLE FOR ICY AND SNOWY ROAD



DRAINAGE AND SLIP RESISTANCE

■ Three longitudinal grooves designed on tread improve slip resistant performance on snowy roads in winter.

HERRING BONE PATTERNS PROVIDING STRONGER GRIP

■ Herring bone patterns on tread have strong ice breaking and water drainage performance, and big ground touching areas ensures the characteristics of tires on icy and snowy roads.

BETTER OPERATION AND CONTROL PERFORMANCE

■ Asymmetric pattern design optimizes the performance of tires on dry and wet grounds, and improves comprehensive operation and control of tires on icy and snowy roads.

Rim Size: 15-21
Speed Rating: H-V
Series: 35-65

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/50R15	-	82H	-	6J	201	577	250	475
	195/55R15	-	85H	-	6J	201	595	250	515
	195/55R16	-	87H	-	6J	201	620	250	545
	205/55R16	-	91H	-	6½J	214	632	250	615
	215/55R16	-	97H	XL	7J	226	642	290	730
16	225/55R16	-	99H	XL	7J	233	654	290	775
	205/60R16	-	96H	XL	6J	209	652	290	710
	215/60R16	-	99H	XL	6½J	221	664	290	775
	225/60R16	-	102H	XL	6½J	228	676	290	850
	235/60R16	-	100H	-	7J	240	688	250	800
17	215/65R16	-	98H	-	6½J	221	686	250	750
	215/45R17	-	91V	XL	7J	213	626	290	615
	225/45R17	-	94V	XL	7½J	225	634	290	670
	235/45R17	-	97V	XL	8J	236	644	290	730
	205/50R17	-	93V	XL	6½J	214	638	290	650
18	215/50R17	-	95V	XL	7J	226	648	290	690
	225/50R17	-	98V	XL	7J	233	658	290	750
	205/55R17	-	95V	XL	6½J	214	658	290	690
	215/55R17	-	98V	XL	7J	226	668	290	750
	225/55R17	-	101V	XL	7J	233	680	290	825
19	235/55R17	-	103V	XL	7½J	245	690	290	875
	225/40R18	-	92V	XL	8J	230	637	290	630
	235/40R18	-	95V	XL	8½J	241	645	290	690
	245/40R18	-	97V	XL	8½J	248	653	290	730
	235/45R18	-	98V	XL	8J	236	669	290	750
20	225/50R18	-	99V	XL	7J	233	683	290	775
	255/55R18	-	109V	XL	8J	265	737	290	1030
	225/35R19	-	88V	XL	8J	230	641	290	560
	235/35R19	-	91V	XL	8½J	241	647	290	615
	245/35R19	-	93V	XL	8½J	248	655	290	650
21	255/35R19	-	96V	XL	9J	260	661	290	710
	255/40R19	-	100V	XL	9J	260	687	290	800
	245/45R19	-	102V	XL	8J	243	703	290	850
	235/55R19	-	105V	XL	7½J	245	741	290	925
	315/35R20	-	110V	XL	11J	320	728	290	1060
22	245/40R20	-	99V	XL	8½J	248	704	290	775
	275/40R20	-	106V	XL	9½J	278	728	290	950
	285/50R20	-	116H	XL	9J	297	794	290	1250
23	295/40R21	-	111V	XL	10½J	301	769	290	1090

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/50R15	-	82H	-	6J	201	577	250	475
	195/55R15	-	85H	-	6J	201	595	250	515
	195/55R16	-	87H	-	6J	201	620	250	545
	205/55R16	-	91H	-	6½J	214	632	250	615
	215/55R16	-	97H	XL	7J	226	642	290	730
16	225/55R16	-	99H	XL	7J	233	654	290	775
	205/60R16	-	96H	XL	6J	209	652	290	710
	215/60R16	-	99H	XL	6½J	221	664	290	775
	225/60R16	-	102H	XL	6½J	228	676	290	850
	235/60R16	-	100H	-	7J	240	688	250	800
17	215/65R16	-	98H	-	6½J	221	686	250	750
	215/45R17	-	91V	XL	7J	213	626	290	615
	225/45R17	-	94V	XL	7½J	225	634	290	670
	235/45R17	-	97V	XL	8J	236	644	290	730
	205/50R17	-	93V	XL	6½J	214	638	290	650
18	215/50R17	-	95V	XL	7J	226	648	290	690
	225/50R17	-	98V	XL	7J	233	658	290	750
	205/55R17	-	95V	XL	6½J	214	658	290	690
	215/55R17	-	98V	XL	7J	226	668	290	750
	225/55R17	-	101V	XL	7J	233	680	290	825
19	235/55R17	-	103V	XL	7½J	245	690	290	875
	225/40R18	-	92V	XL	8J	230	637	290	630
	235/40R18	-	95V	XL	8½J	241	645	290	690
	245/40R18	-	97V	XL	8½J	248	653	290	730
	235/45R18	-	98V	XL	8J	236	669	290	750
20	225/50R18	-	99V	XL	7J	233	683	290	775
	255/55R18	-	109V	XL	8J	265	737	290	1030
	225/35R19	-	88V	XL	8J	230	641	290	560
	235/35R19	-	91V	XL	8½J	241	647	290	615
	245/35R19	-	93V	XL	8½J	248	655	290	650
21	255/35R19	-	96V	XL	9J	260	661	290	710
	255/40R19	-	100V	XL	9J	260	687	290	800
	245/45R19	-	102V	XL	8J	243	703	290	850
	235/55R19	-	105V	XL	7½J	245	741	290	925
	315/35R20	-	110V	XL	11J	320	728	290	1060
22	245/40R20	-	99V	XL	8½J	248	704	290	775
	275/40R20	-	106V	XL	9½J	278	728	290	950
	285/50R20	-	116H	XL	9J	297	794	290	1250
23	295/40R21	-	111V	XL	10½J	301	769	290	1090



RW611
SUITABLE FOR ICY AND SNOWY ROAD



Rim Size: 13-16
Speed Rating: T-H
Series: 55-80



■ Advanced piece-shape pattern design with special formula for ice and snow provides newly-developed tread with better flexibility and bigger ground area when tires are driven on a snowy road. Snow columns are not easy to be cut off, and tires can be provided with more powerful driving forces.

MORE BALANCED PERFORMANCE

■ Symmetric pattern design and big shoulder pattern piece design, which can produce lateral forces when tires are driven, improve traction on snowy and icy roads. It significantly improves driving and braking performance, and optimizes driving precision on dry and wet roads to the maximum, more helpful to reduce driving noise.

MORE LASTING EFFECT

■ Special formula for ice and snow can ensure that tires maintain a very good winter performance in the middle and late period of wearing.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75T	-	4½J	157	548	250	387
	165/70R13	-	79T	-	5J	170	562	250	437
	175/70R13	-	82T	-	5J	177	576	250	475
	155/80R13	-	79T	-	4½J	157	578	240	437
14	185/55R14	-	80T	-	6J	194	560	250	450
	185/60R14	-	82T	-	5½J	189	578	250	475
	175/65R14	-	82T	-	5J	177	584	250	475
	185/65R14	-	86T	-	5½J	189	596	250	530
15	165/70R14	-	81T	-	5J	170	588	250	462
	175/70R14	-	84T	-	5J	177	602	250	500
	185/70R14	-	88T	-	5½J	189	616	250	560
	185/55R15	-	86H	XL	6J	194	585	290	530

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	185/60R15	-	84T	-	5½J	189	603	250	500
	185/60R15	-	88T	XL	5½J	189	603	290	560
	195/60R15	-	88T	-	6J	201	615	250	560
	185/65R15	-	88T	-	5½J	189	621	250	560
16	195/65R15	-	91T	-	6J	201	635	250	615
	205/65R15	-	94T	-	6J	209	647	250	670
	215/65R15	-	96H	-	6½J	221	661	250	710
	205/55R16	-	91T	-	6½J	214	632	250	615



RW631
SUITABLE FOR SALOON CAR/SUV IN ICY AND SNOWY ROAD



Inlaid nail anti-skid technology and Super-strong grip;
Excellent wetland performance and effective
prevention of skidding;
Superior handling and braking performance.

Rim Size: 13-20
Speed Rating: Q-H
Series: 40-80



DESIGNED FOR ICY AND SNOWY ROAD
CONDITIONS

■ With optimized nail hole arrangement, the entire tire can be equipped with 200 snow nails (Here take 205/55R16 as an example, different sizes have different circumstances). The Inlaid nail anti-skid technology shows super-strong grip capability on snowy and icy roads.

SINGLE-ORIENTED PATTERN

■ Directional pattern design can effectively drain and remove snow, enhancing performance on wet ground. This design on tread obviously improves skid resistance performance on snowy and icy roads in winter.

MORE SUBTLE DESIGN CAN ENHANCE THE
PERFORMANCE OF HANDLING AND
BRAKING PERFORMANCE

■ As you can see, tire pattern is concave and convex shape at the edge of the groove and the sharp teeth shape in the middle of the groove. The shape of each pattern likes lightning. The design of these pattern grooves can effectively drain and remove snow, also significantly enhance operation and braking performance in icy and snowy road conditions.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/70R13	-	82T	-	5J	177	576	250	475
	155/80R13	-	83Q	XL	4½J	157	578	280	487
14	175/65R14	-	86T	XL	5J	177	584	290	530
15	195/65R15	-	91T	-	6J	201	635	250	615
	195/65R15	-	95T	XL	6J	201	635	290	690
16	205/55R16	-	94T	XL	6½J	214	632	290	670
17	225/45R17	-	94H	XL	7½J	225	634	290	670
	225/50R17	-	98H	XL	7J	233	658	290	750

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	225/55R17	-	101H	XL	7J	233	680	290	825
	225/65R17	-	102T	-	6½J	228	724	250	850
	235/65R17	-	104T	-	7J	240	738	250	900
18	225/40R18	-	92H	XL	8J	230	637	290	630
	225/45R18	-	95H	XL	7½J	225	659	290	690
	225/55R18	-	102H	XL	7J	233	705	290	850
	235/60R18	-	107H	XL	7J	240	739	290	975
	275/55R20	-	117H	XL	8½J	284	810	290	1285




RW312
SUITABLE FOR SALOON CAR/SUV IN ICY AND SNOWY ROAD



Impressive braking and cornering ability
in winter driving conditions

Rim Size:	13-22
Speed Rating:	Q-H
Series:	30-70

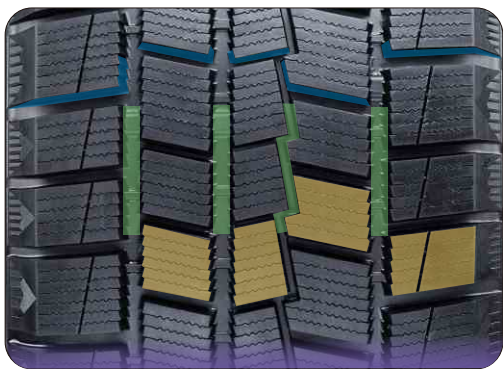

EXCELLENT BRAKING PERFORMANCE

■ The reinforced bars and jagged design provide excellent braking performance that ensures safety in driving.



PRECISE CONTROL

■ The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on snowy and icy roads.

STRONG GRIP

■ The increased number of lugs and grooves on tread provide better snow traction and drainage performance, showing excellent grip capability on snowy and icy roads.

In the early stage of development, we optimized stress distribution on tire by FE simulation analysis. The actual footprint of tire shows that the stress distribution is uniform and the grounding area is increased, indicating the improved stability and safety of the tire when traveling on snowy and icy roads.

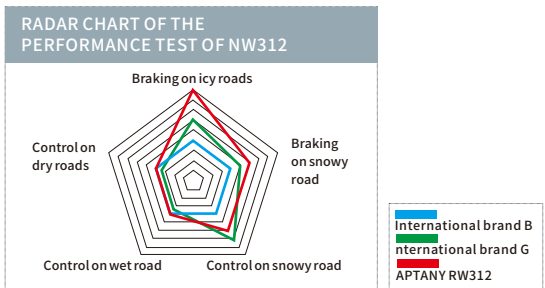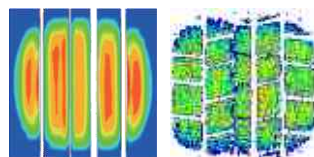

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/60R13	-	77Q	-	5.00B/5J	177	540	250	412
	155/65R13	-	73Q	-	4.50B/4½J	157	532	250	365
	165/65R13	-	77Q	-	5.00B/5J	170	544	250	412
	165/70R13	-	83Q	XL	5.00B/5J	170	562	290	487
	175/70R13	-	82Q	-	5.00B/5J	177	576	250	475
14	165/60R14	-	75Q	-	5.00B/5J	170	554	250	387
	175/60R14	-	79Q	-	5.00B/5J	177	566	250	437
	185/60R14	-	82Q	-	5½J	189	578	250	475
	195/60R14	-	86Q	-	6J	201	590	250	530
	155/65R14	-	75Q	-	4.50B/4½J	157	558	250	387
15	175/65R14	-	82Q	-	5.00B/5J	177	584	250	475
	185/65R14	-	90Q	XL	5½J	189	596	290	600
	165/70R14	-	85Q	XL	5.00B/5J	170	588	290	515
	175/70R14	-	88Q	XL	5.00B/5J	177	602	290	560
	185/70R14	-	88Q	-	5½J	189	616	250	560
16	185/55R15	-	86Q	XL	6J	194	585	290	530
	195/55R15	-	85Q	-	6J	201	595	250	515
	185/60R15	-	84Q	-	5½J	189	603	250	500
	195/60R15	-	88Q	-	6J	201	615	250	560
	175/65R15	-	84Q	-	5J	177	609	250	500
17	185/65R15	-	88Q	-	5½J	189	621	250	560
	195/65R15	-	91Q	-	6J	201	635	250	615
	205/65R15	-	94Q	-	6J	209	647	250	670
	205/70R15	-	96Q	-	6J	209	669	250	710
	205/55R16	-	91S	-	6½J	214	632	250	615
18	215/55R16	-	97Q	XL	7J	226	642	290	730
	225/55R16	-	99Q	XL	7J	233	654	290	775
	195/60R16	-	89Q	-	6J	201	640	250	580
	205/60R16	-	92Q	-	6J	209	652	250	630
	215/60R16	-	99Q	XL	6½J	221	664	290	775
19	225/60R16	-	98Q	-	6½J	228	676	250	750
	205/65R16	-	95Q	-	6J	209	672	250	690
	215/65R16	-	98Q	-	6½J	221	686	250	750
	215/70R16	-	100Q	-	6½J	221	708	250	800
	225/45R17	-	91T	-	7½J	225	634	250	615
20	235/45R17	-	97S	XL	8J	236	644	290	730
	255/45R17	-	102S	XL	8½J	255	662	290	850
	215/50R17	-	95S	XL	7J	226	648	290	690
	235/50R17	-	98S	XL	7J	233	654	290	775
	255/50R17	-	103S	XL	7½J	245	690	290	875
21	215/60R17	-	96S	-	6½J	221	690	250	710
	225/60R17	-	103S	XL	6½J	228	702	290	875
	225/65R17	-	102S	-	6½J	228	724	250	850
	235/65R17	-	104S	-	7J	240	738	250	900
	245/65R17	-	111S	XL	7J	248	750	290	1090
22	265/65R17	-	112S	-	8J	272	776	250	1120
	245/70R17	-	110S	-	7J	248	776	250	1060
	255/40R18	-	99S	XL	9J	260	661	290	775
	225/45R18	-	95S	XL	7½J	225	659	290	690
	245/45R18	-	100S	XL	8J	243	677	290	800
23	215/50R18	-	92T	-	7J	226	673	250	630
	235/50R18	-	101S	XL	7½J	245	693	290	825
	215/55R18	-	99S	XL	7J	226	693	290	775
	235/55R18	-	104S	XL	7½J	245	715	290	900
	225/60R18	-	104S	XL	6½J	228	727	290	900
24	235/60R18	-	107S	XL	7J	240	739	290	975
	245/60R18	-	105T	-	7J	248	751	250	925
	265/60R18	-	114S	XL	8J	272	775	290	1180
	235/65R18	-	106T	-	7J	240	763	250	950
	225/45R19	-	92H	-	7½J	225	685	250	630
25	235/50R19	-	99T	-	7½J	245	719	250	775
	255/50R19	-	103T	-	8J	265	739	250	875
	225/55R19	-	99T	-	7J	233	731	250	775
	235/55R19	-	101T	-	7½J	245	741	250	825
	245/55R19	-	103S	-	7½J	253	753	250	875
26	305/30R20	-	99Q	-	11J	313	692	250	775
	245/45R20	-	99T	-	8J	243	728	250	775
	275/45R20	-	110T	XL	9J	273	756	290	1060
	255/50R20	-	109H	XL	8J	265	764	290	1030
	235/55R20	-	105S	XL	7½J	245	766	290	925
27	255/45R21	-	102S	-	8½J	255	736	250	850
	265/45R21	-	104T	-	9J	266	771	250	900
	235/70R16	-	106S	-	7J	240	736	250	950
	245/70R16	-	107S	-	7J	248	750	250	975
	255/70R16	-	111S	-	7½J	260	764	250	1090
28	265/70R16	-	112S	-	8J	272	778	250	1120
	205/50R17	-	89T	-	6½J	214	638	250	580
	245/40R18	-	93T	-	8½J	248	653	250	650
	235/45R18	-	94T	-	8J	236	669	250	670
	225/50R18	-	95T	-	7J	233	683	250	690
29	245/50R18	-	100T	-	7½J	253	703	250	800
	225/55R18	-	98T	-	7J	233	705	250	750
	265/65R18	-	114T	-	8J	272	801	250	1180
	275/35R19	-	96H	-	9½J	278	675	250	710
	235/40R19	-	92H	-	8½J	241	671	250	630
30	245/40R19	-	94H	-	8½J	248	679	250	670
	275/40R19	-	101H	-	9½J	275	703	250	825
	235/45R19	-	95H	-	8J	236	695	250	630
	245/45R19	-	98H	-	8J	243	703	250	750
	255/45R19	-	100H	-	8½J	255	713	250	800
31	245/50R19	-	101H	-	7½J	253	729	250	825
	265/50R19	-	106H	-	8½J	277	749	250	950
	255/55R19	-	107H	-	8J	265	763	250	975
	265/55R19	-	109H	-	8½J	277	775	250	1030
	235/60R19	-	103H	-	7J	240	765	250	875
32	255/60R19	-	109H	-	7½J	260	789	250	1030
	275/35R20	-	98H	-	9½J	278	700	250	750
	315/35R20	-	106H	-	11J	320	728	250	950
	255/40R20	-	97H	-	9J	260	712	250	730
	265/40R20	-	100H	-	9½J	271	720	250	800
33	275/40R20	-	102H	-	9½J	278	728	250	850
	255/45R20	-	101H	-	8½J	255	738	250	825
	265/45R20	-	104H	-	9J	266	746	250	900
	285/45R20	-	108H	-	9½J	285	764	250	1000
	235/50R20	-	100H	-	7½J	245	744	250	800
34	245/50R20	-	102H	-	7½J	253	754	250	850
	275/50R20	-	109H	-	8½J	284	784	250	1030
	285/50R20	-	112H	-	9J	297	794	250	1120
	255/55R20	-	110H	XL	8J	265	788	290	1060
	275/55R20	-	113H	-	8½J	284	810	250	1150
35	275/45R21	-	107H	-	9J	273	781	250	975
	285/45R21	-	109H	-	9½J	285	789	250	1030
	315/35ZR22	-	111H	XL	11J	320	779	290	1090
	265/40R22	-	106H	XL	9½J	271	771	290	950
	275/40R22	-	107H	XL	9½J	278	779	290	975
36	285/40R22	-	106H	-	10J	290	787	250	950
	285/45R22	-	110H	-	9½J	285	815	250	1060
	235/70R16	-	106S	-	7J	240	736	250	950
	245/70R16	-	107S	-	7J	248	750	250	975
	255/70R16	-	111S	-	7½J	260	764	250	1090
37	265/70R16	-	112S	-	8J	272	778	250	1120
	205/50R17	-	89T	-	6½J	214	638	250	580
	245/40R18	-	93T	-	8½J	248	653	250	650
	235/45R18	-	94T	-	8J	236	669	250	670
	225/50R18	-	95T	-	7J	233	683	250	690
38	245/50R18	-	100T	-	7½J	253	703	250	800
	225/55R18	-	98T	-	7J	233	705	250	750
	265/65R18	-	114T	-	8J	272	801	250	1180
	275/35R19	-	96H	-	9½J	278	675	250	710
	235/40R19	-	92H	-	8½J	241	671	250	630

RW103

SUITABLE FOR COMMERCIAL LIGHT TRUCK IN ICY AND SNOWY ROAD



Excellent carrying capacity
Superior wetland performance and skid resistance
Super-strong grip on icy and snowy road

Rim Size:	14-16
Speed Rating:	R-T
Series:	65-75



**REINFORCED CARCASS,THE BETTER
LOAD-BEARING PERFORMANCE**


■ Designed for commercial light truck with double carcass structure,it has better load-bearing performance.

**SUPERIOR WETLAND PERFORMANCE
AND SKID RESISTANCE**

■ The tread groove design with s shape on both sides and z shape in the middle which can greatly enhance the tire drainage performance.The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on icy and wet road .

**SUPER-STRONG GRIP ON ICY AND SNOWY
ROAD**


■ The upgraded tread groove design can effectively strengthen the tire grip and braking performance, which ensures safety and stability in driving.



Pattern joint



The shape of
groovelike "T"



Have the difference
between high and low
at the edge of shoulder



The more close
pattern groove

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	165/70R14C	6	89/87R	-	5J	170	588	375	580
	195/70R15C	8	104/102R	-	6J	201	655	450	900
15	215/70R15C	8	109/107R	-	6½J	221	683	450	1030
	225/70R15C	8	112/110R	-	6½J	228	697	450	1120
16	195/65R16C	8	104/102T	-	6J	201	660	475	900
	205/65R16C	8	107/105R	-	6J	209	672	475	975

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	215/65R16C	8	109/107R	-	6½J	221	686	475	1030
	225/65R16C	8	112/110R	-	6½J	228	698	475	1120
15	235/65R16C	8	115/113R	-	7J	240	712	475	1215
	195/75R16C	8	107/105T	-	5½J	196	698	475	975
16	215/75R16C	8	113/111R	-	6J	216	728	475	1150
	225/75R16C	10	121/120R	-	6J	223	744	575	1450

